

**Tulsa Metropolitan Area
Planning Commission**



Case PUD-871 Staff Report

Project Clydesdale

Hearing Date: June 4, 2025

(Related to case CZ-565 & Plat Clydesdale)

Prepared by: Carmen Pate

cpate@incog.org 918-579-9476

Owner and Applicant Information

Applicant: Lou Reynolds

Property Owner:

Bird Creek Ranch limited partnership, et al.
c/o Lou Reynolds


Property Location

West of North Sheridan Road between East 76th
street north and East 86th Street north.

Tract Size: ±506 acres

Location within Tulsa County

(shown with County Commission districts)

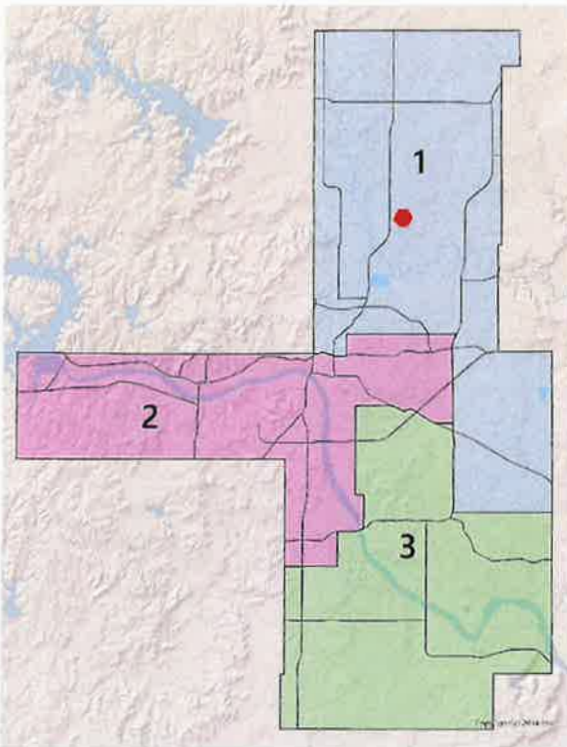

Elected Representatives

County Commission: District 1, Stan Sallee

Staff Recommendation

Staff recommends **approval**.

Request Summary

Rezone subject properties from AG to IL with a PUD overlay to permit light industrial uses similar to a data center.

Zoning

Existing Zoning: Agriculture (AG)

Proposed Zoning: Light Industrial (IL / PUD-871)

Use

Current Use: Not Developed /Agriculture

Proposed Use: Uses outlined in PUD-871 including
Data Centers

Comprehensive Plan Considerations

Land Use

Land Use Plan: Highway 75 Planning Area

Transportation

Major Street & Highway Plan:

East 86th Street North Primary Arterial

East 76th Street North, North Yale and North Sheridan
are all Secondary Arterial

Residential Collector system shown but not anticipated
with this development

Transit: None

Existing Bike/Ped Facilities: None

Planned Bike/Ped Facilities: None

Environment

Flood Plain: The east portion of the site is included in
the FEMA floodplain and floodway designation

Parks & Open Space: None



SECTION 1: Detailed Staff Recommendation

The applicant is requesting to rezone from AG to IL with PUD-871 to permit development on the site consistent with the Tulsa County Zoning Code for uses and building types typically associated with IL zoning and those uses and building types associated with special exception provisions in the IM zoning district and defined in the related PUD Development Standards outlined below.

A rezoning is being concurrently proposed with this PUD (CZ-565). The proposed PUD will establish allowable use and the bulk and area requirements.

Staff has reviewed the request and finds that it is non-injurious to the surrounding proximate properties and consistent with the Comprehensive Plan and the anticipated future development pattern of the surrounding area, therefore;

With consideration given to the factors listed herein, staff recommend **approval** of the application for PUD 871 but only with the related and IL zoning application.

SECTION 2: APPLICANT DEVELOPMENT STATEMENT

The Planned Unit Development District ("PUD") is a supplemental Zoning District authorized by Chapter 5, Section 5020 of the Tulsa County Zoning Regulations. A PUD establishes the regulatory framework, including permitted uses, development standards and design guidelines, for a particular project (the "Development Standards"). A PUD may only modify the provisions of the Tulsa County Zoning Regulations and does not modify any other Tulsa County laws, regulations or requirements.

A PUD may include background information and narrative discussion, including purpose and intent statements that are intended to illustrate the overall character and vision for the Project. Such statements, unless expressly part of the Development Standards, are not regulatory and are not requirements to be enforced by Tulsa County.

The Development Standards apply to all property within the PUD project boundaries. The Development Standards supersede and replace all applicable Tulsa County Zoning Regulations. If there is a conflict between the Development Standards and the Tulsa County Zoning Regulations, the Development Standards shall apply. If a provision is not addressed by the PUD, then the Tulsa County Zoning Regulations control.



APPLICANT DEVELOPMENT CONCEPT

The proposed Project Clydesdale is located on approximately 506 acres bounded on the east by North Sheridan Road, on the south by East 76th Street North, on the north by East 86th Street North, on the West by the North Tulsa Commerce Center zoned IL and the Westgate Subdivision zoned RS-3 and various rural residential developed properties zoned AG and North Yale Avenue ("the Project"). Immediately south of the Project is the Cherokee Industrial Park.

A 150-foot-wide electrical right-of-way, owned by the Grand River Dam Authority ("GRDA") crosses the southerly third of the Property running from the southeast corner to the west boundary.

PUD-871 uses substantial buffering, building setbacks, open space and landscaping and other design details to ensure the integration of the Project into the surrounding area. To buffer the rural residential tracts to the west and north and any future residential development to the east, the Project includes a 150-foot landscaped buffer along the south boundary of Westgate Addition, the north approximately 2,600 feet of the west boundary, and the north boundary. Additionally, no building will be located within 300 feet of the south boundary of Westgate Addition, the north approximately 2,600 feet of the west boundary (which includes the east boundary of Westgate Addition), and the north boundary. Additionally, except as necessary for utility lines and crossings, an approximate 815 foot wide area will be left in its natural state along North Sheridan Road (measured from the edge of the City of Tulsa Fence Line). The project's design seamlessly integrates with adjacent industrial zones while preserving residential quality of life through strategic 150-foot landscape buffers, 300-foot building setbacks, and natural area preservation along Sheridan Road.

Exhibit "A" is an Aerial Photograph and shows the location of Project Clydesdale.

The purpose of PUD-871 is to create a regulatory framework for the development of a technology park that will attract high wage jobs in technology, offices, industrial, warehouse and related uses. Specific uses, building locations, building design and overall layout will be refined as future uses as the Project develops. The Development Standards establish land use entitlements flexibility and design expectations to encourage and attract future uses and ensure compatibility with the area.

The Development Standards apply to all property within the PUD project boundaries. The Development Standards supersede and replace all applicable Tulsa County Zoning Regulations. If there is a conflict between the Development Standards and the Tulsa County Zoning Regulations,



the Development Standards shall apply. If a provision is not addressed by the PUD, then the Tulsa County Zoning Regulations control.

PUD-871 provides a framework for a well-planned, cohesive project that integrates and permits technology, office, industrial, warehouse and related uses in a connected and aesthetically pleasing and unified development. As shown on Exhibit "B", Existing Zoning, the site is currently zoned AG - Agriculture District, Tulsa County's least intense zoning designation. The purpose of this request, along with companion application CZ-565, is to rezone the Project area into two zones: 1) IL - Light Industrial District overlayed with a supplemental zoning district and 2) AG - Agricultural, PUD-871 to facilitate a flexible supplemental Zoning District with a variety of compatible land uses and facilitate the site's development as an employment and technology hub. See Exhibit "C", Proposed Zoning.

This Project may have multiple reserve areas or easements for stormwater drainage and detention, secured entrances, access drives, landscaping, open space and natural areas. Additionally, this Project will include electrical substations.

The Development Plan for the Project is shown on Exhibit "D"

The Project will have access to East 76th Street North, East 86th Street North, North Sheridan Road and North Yale Avenue. The Project perimeter will be gated and secured with private access drives connecting lots to public access. Lots will not require public street frontage. Right-of-way along the section lines will be dedicated, as necessary, to comply with the Tulsa City-County Major Street and Highway Plan.

Except for a tributary of Ranch Creek running in a southerly direction along the easterly boundary of the Project, which is located in FEMA Flood Zone AE, the Project is otherwise located within FEMA Flood Zone Unshaded X (out of the 500-year flood plain). The Project may have one (1) Project sign along East 76th Street North, one (1) Project sign along East 86th Street North and one (1) sign along North Yale Avenue (for utility purposes only).

Detailed Development Plans will be submitted to the County for administrative approval at the time of site plan review for each phase of the Project.

SECTION 3: PUD-871 DEVELOPMENT STANDARDS

LAND AREA

Gross	22,037,663 Square Feet	506 Acres
-------	------------------------	-----------



PERMITTED USES

Public, Civic and Institutional Use Category:

- Natural Resource Preservation
- Utility and Public Services Facility, Minor
- Utility and Public Services Facility, Major
- Wireless Communication Facility:
 - Freestanding Tower
 - Building or Tower-mounted Antenna

Commercial Use Category

- Commercial Service
- Financial Services
- Lodging
- Office (excluding Plasma Center)
- Retail Sales

Wholesale, Distribution and Storage

Industrial:

- Low-impact Manufacturing and Industry
- Moderate-impact Manufacturing and Industry,
Including, but not limited to Data Centers for processing and storing
of digital data.

For purposes of PUD-871, the term "Data Center" shall mean a facility or facilities used to house, and in which are operated, maintained and replaced from time to time, computer systems and associated components, including but not limited to telecommunications and storage systems, cooling systems, power supplies and systems for managing electrical and mechanical performance, and equipment used for the transformation, transmission, distribution and management of electricity for on-site uses, internet-related equipment, data communications connections, private communication towers, environmental controls and security devices.

And Uses Customarily Accessory to the Permitted Uses, which Customary Accessory Uses for Data Centers may include, but are not limited to the following:



Electrical Substations/Switching Stations
Backup Generators
Security Guardhouses
Cooling Towers (air or water)
Fuel Storage Tanks
Temporary Utility Services
Central Utility Buildings
Storm Shelters
Restroom Buildings
Water Holding Tanks
Water Treatment Facilities
Wastewater Treatment Facilities
Temporary Construction Trailers
Flow Equalization Basins or Tanks
Battery Storage Equipment
Mining and Mineral Processing Uses are prohibited within the Project

MAXIMUM BUILDING FLOOR AREA RATIO (PROJECT): 0.75

MINIMUM BUILDING AND COMMUNICATION TOWER SETBACKS

Along East 76th Street North*	150 Feet
Along North Sheridan Road*	815 Feet
Along East 86th Street North*	300 Feet
Along North Yale Avenue (*)(**)	300 Feet
Along the southerly boundary of Westgate Addition	300 Feet
Along the north approximately 2,600 feet of the west boundary	300 Feet
Along the westerly boundary south of the GRDA electrical right-of-way	50 Feet

* Setbacks shall be measured from (a) the existing street right-of-way along East 76th Street North and East 86th Street North, (b) the section line along North Yale Avenue, and (c) the edge of the City of Tulsa Fence Line along North Sheridan Road.

** Electrical substations shall be subject to the building setbacks set forth above.

MAXIMUM BUILDING HEIGHT: 50 Feet*

* Architectural, mechanical or electrical elements (elements extending above the



building roofline) shall be permitted up to 20 additional feet for unoccupied features. The forgoing height limitation does not apply to overhead electrical lines.

MAXIMUM COMMUNICATION TOWER HEIGHT AND SETBACK: 200 Feet*

*Provided that no Communication Tower will be located within the setbacks noted above.

BUILDING COLORS, MATERIALS AND DESIGN:

All exposed exterior walls of main occupiable buildings that are visible from public streets shall employ cohesive design within the Project that uses similar materials with varied textures and colors to provide visual contrast. This may be achieved by including a change in color, texture, or building material in a pattern that repeats at various intervals.

OFF-STREET PARKING:

Minimum spaces for Data Centers:

One (1) space per ten thousand square feet (20,000 SF) of building floor area.

Minimum spaces for office Buildings:

One (1) space per one thousand (1000 SF) of building floor area.

For Any Other Use:

As required by Table 10-1: Minimum Off-street Parking Ratios of the Tulsa County Zoning Code.

LOADING AREAS:

For Data Center Use:

No loading areas are required

For Office Buildings:

No loading areas are required.

SECURITY FENCING:

The secure areas of the Project will be fenced with an 8-foot minimum height chain link fence or similar.

LANDSCAPE BUFFERS:

Along East 76th Street North	100 Feet
Along East 86th Street North	150 Feet
Along North Yale Avenue	150 Feet
Along the southerly boundary of Westgate Addition	150 Feet



Along the north approximately 2,600 feet of the west boundary	150 Feet
Along the westerly boundary south of the GRDA electrical right-of-way	50 Feet

Within all landscape buffers, there shall be, at minimum, one (1) tree in every 20 linear feet along the buffer. Where additional trees are necessary, they shall be added with a ratio of four (4) canopy trees and two (2) evergreen trees per 100 linear feet. All canopy and evergreen trees shall be at least eight (8) feet in height, or greater, at the time of planting. Existing trees shall be counted toward this requirement.

NATURAL AREAS:

Along North Sheridan Road	815 Feet
---------------------------	----------

The easternmost 815' of the property (measured from the westerly boundary of the City of Tulsa Fence Line) shall be a natural area and may or may not be located in a Reserve Area. This area can be used for utility corridors along and within.

Because of the identified landscape buffers, natural areas, and the applicable building setbacks in the tables above, no opaque screening fencing will be required along any of the Project boundaries.

The details of such buffers and natural areas along the Project boundary are shown on Exhibit "E"

SIGNS:

Signs will comply with Chapter 11 of Tulsa County Zoning Regulations.

ACCESS AND CIRCULATION:

Primary points of vehicular access shall be located on East 76th Street North and East 86th Street North. These access points will include secure and gated entrance. There will be no primary access points along North Sheridan Road or North Yale Avenue the exception of utility services.

Emergency access will be from East 76th Street North and East 86th Street North.



INTERIOR ACCESS DRIVES

Individual lots will not require street frontage or direct access to public streets but will require connected private access drives ultimately connecting to ingress/egress points of the overall project. Interior access drives will be private and designed and constructed in accordance with the design requirements of the International Fire Code (IFC) for fire apparatus access. Gravel drives are not permitted.

SECTION 4: APPLICANT SITE ANALYSIS AND EXHIBITS

TOPOGRAPHY AND SOILS:

The Custom Soil Resource Report for Tulsa County, Oklahoma, published by the United States Department of Agriculture and Natural Resources Conservation Services provides that the Property contains a number of different soil types.

Any development constraints associated with these soils and the topography will be addressed during the engineering design, permitting, and platting of the Project.

Existing topography and soils are represented on Exhibit "F", Existing Topography and Soils attached hereto

UTILITIES:

The project will be served by a public drinking water supply to the project and may be distributed through private lines to individual lots, in accordance with applicable regulations of the Oklahoma Water Resources Board and the Oklahoma Department of Environmental Quality.

The overall project will be served by a public sanitary sewer provider and may be collected through a private collection system with private sewer lines from each lot. The system will be designed and constructed in accordance with the standards established by the public sewer provider and the regulations of the Oklahoma Department of Environmental Quality. Existing utilities in and around the site are shown on Exhibit "G"- Existing Utilities.



SECTION 5: Comprehensive Plan Considerations

Land Use Plan

The subject property is designated as: Highway 75 Planning Area in the Unincorporated Tulsa County Comprehensive Plan

Use Category considerations

This designation supports a mix of retail, service, and industrial uses to meet the needs of rural residents and agricultural operations. It encourages diverse land uses, including light and medium industrial activities such as wholesaling, warehousing, and distribution, which may generate heavy truck traffic. Employment areas focus on commercial and industrial activities like office spaces, light manufacturing, and high-tech industries, with minimal residential presence. These areas require direct access to major roads or interstates to support transportation demands, particularly for truck and rail transport. Proper planning for design, screening, and buffering is essential when near residential zones. Outdoor storage or material processing is not generally a suitable option for this area. Residential developments are not considered appropriate and incompatible for this planning area and will not be supported by the Planning Services Department.

Design & Aesthetics

All new land development in the 75 Highway Planning Area, should anticipate working within the Planned Unit Development Process provided in the Tulsa County Zoning Code. That process will generally include:

- Higher quality building materials and site development standards that are currently required in the zoning code.
- Landscaping and green buffers will be required to enhance visual appeal and mitigate environmental impact
- Floodplain development will be limited and maintained as a natural environment.
- Significant building setbacks, lighting limitations, illuminated signage standards and reducing parking standards when appropriate.



Surrounding Properties:

<u>Location</u>	<u>Existing Zoning/Overlay</u>	<u>Existing Land Use Designation</u>	<u>Existing Use</u>
North	AG and RE	Highway 75 Planning Area	Agricultural / Single-Family
East	AG and RE	Owasso fence line (Residential)	Single-Family
South	IL and IM (Mohawk industrial park)	Highway 75 Planning Area	Warehousing and Manufacturing
West	RE and IM	Highway 75 Planning Area	Warehousing and Single Family

Transportation

Major Street & Highway Plan:

- North Yale Avenue is designated as a Secondary Arterial with 100-foot-wide planned right of way.
- East 86th Street North is designated as Primary Arterial with 150-foot-wide planned right of way.
- North Sheridan Road is designated as Secondary Arterial with 100-foot-wide planned right of way however this street is inside the City of Tulsa Fence Line.
- East 76th Street North is designated as a Secondary Arterial with 100-foot-wide planned right of way.

Transit: None

Existing Bike/Ped Facilities: None

Planned Bike/Ped Facilities: None

Environmental Considerations

Flood Area: The existing natural area along the east boundary of the PUD is part of a creek system that is included in the mapped flood plain and flood way. The heavily wooded area



will remain undeveloped and act as a natural buffer with the properties east of North Sheridan Road.

Parks & Open Space: None

Zoning History

Resolution 98254, dated September 15 1980, established zoning for the subject property.

Exhibits

INCOG Exhibits

Case map

Aerial

Tulsa County Comprehensive Plan Land Use Map

Applicant Exhibit:

Exhibit A Aerial Image

Exhibit B Existing Zoning

Exhibit C Proposed Zoning


Exhibit D Project Clydesdale Development Area

Exhibit E Setback and Landscape and Buffer

Exhibit F (sheet 1 of 2) Existing Topography

Exhibit F (sheet 2 of 2) Existing Soils

Exhibit G Existing Utilities (water and sewer only)



Subject
Tract

PUD-871

27 21-13

Note: Graphic overlays may not precisely align with physical features on the ground.


Aerial Photo Date: 2023



Land Use Plan (Exhibit A)
Tulsa County North Area Plan

Legend

- | | | |
|-----------------------------------|---------------------------|-----------------------------------|
| Proposed Highway 75 Planning Area | Industrial | Urban Residential |
| Rural Residential/Agricultural | Public and Quasi Public | Transitional |
| Rural Commercial | Recreation and Open Space | Commercial |
| Parks and Open Space | Commercial | Industrial/Regional Employment |
| Public/Semi-Public | Industrial | Public/Institutional/Quasi-Public |
| Industrial | Neighborhood Mixed Use | Parks/Recreation |
| Collinsville | Park/Recreation | Sperry |
| Agriculture | Public/Institutional | AG Residential |
| Residential | Residential | Commercial |
| Office | Transitional | Industrial |
| Commercial | Skiatook | Public/Park/Tribal |
| | Rural Residential | |

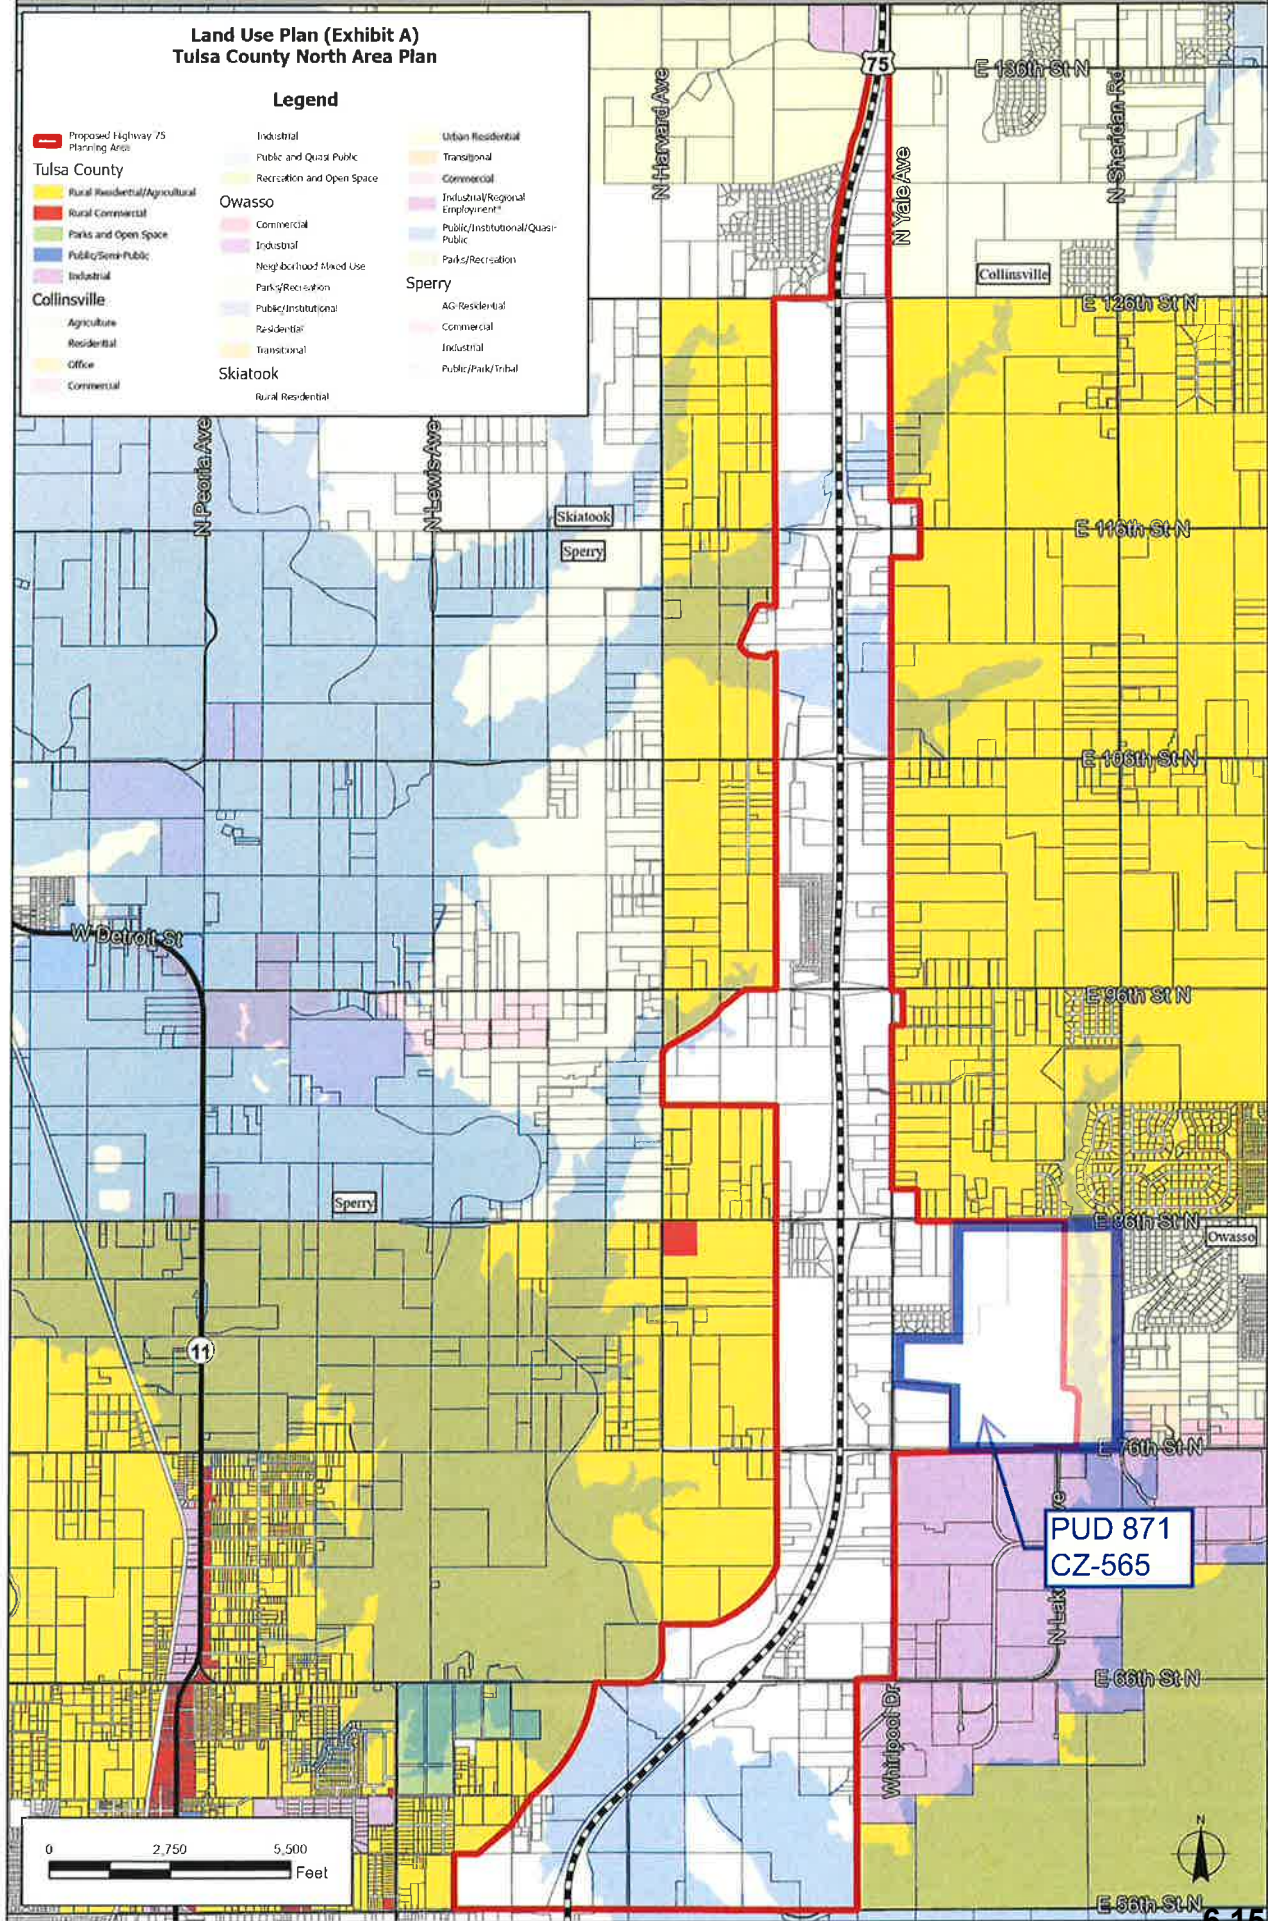

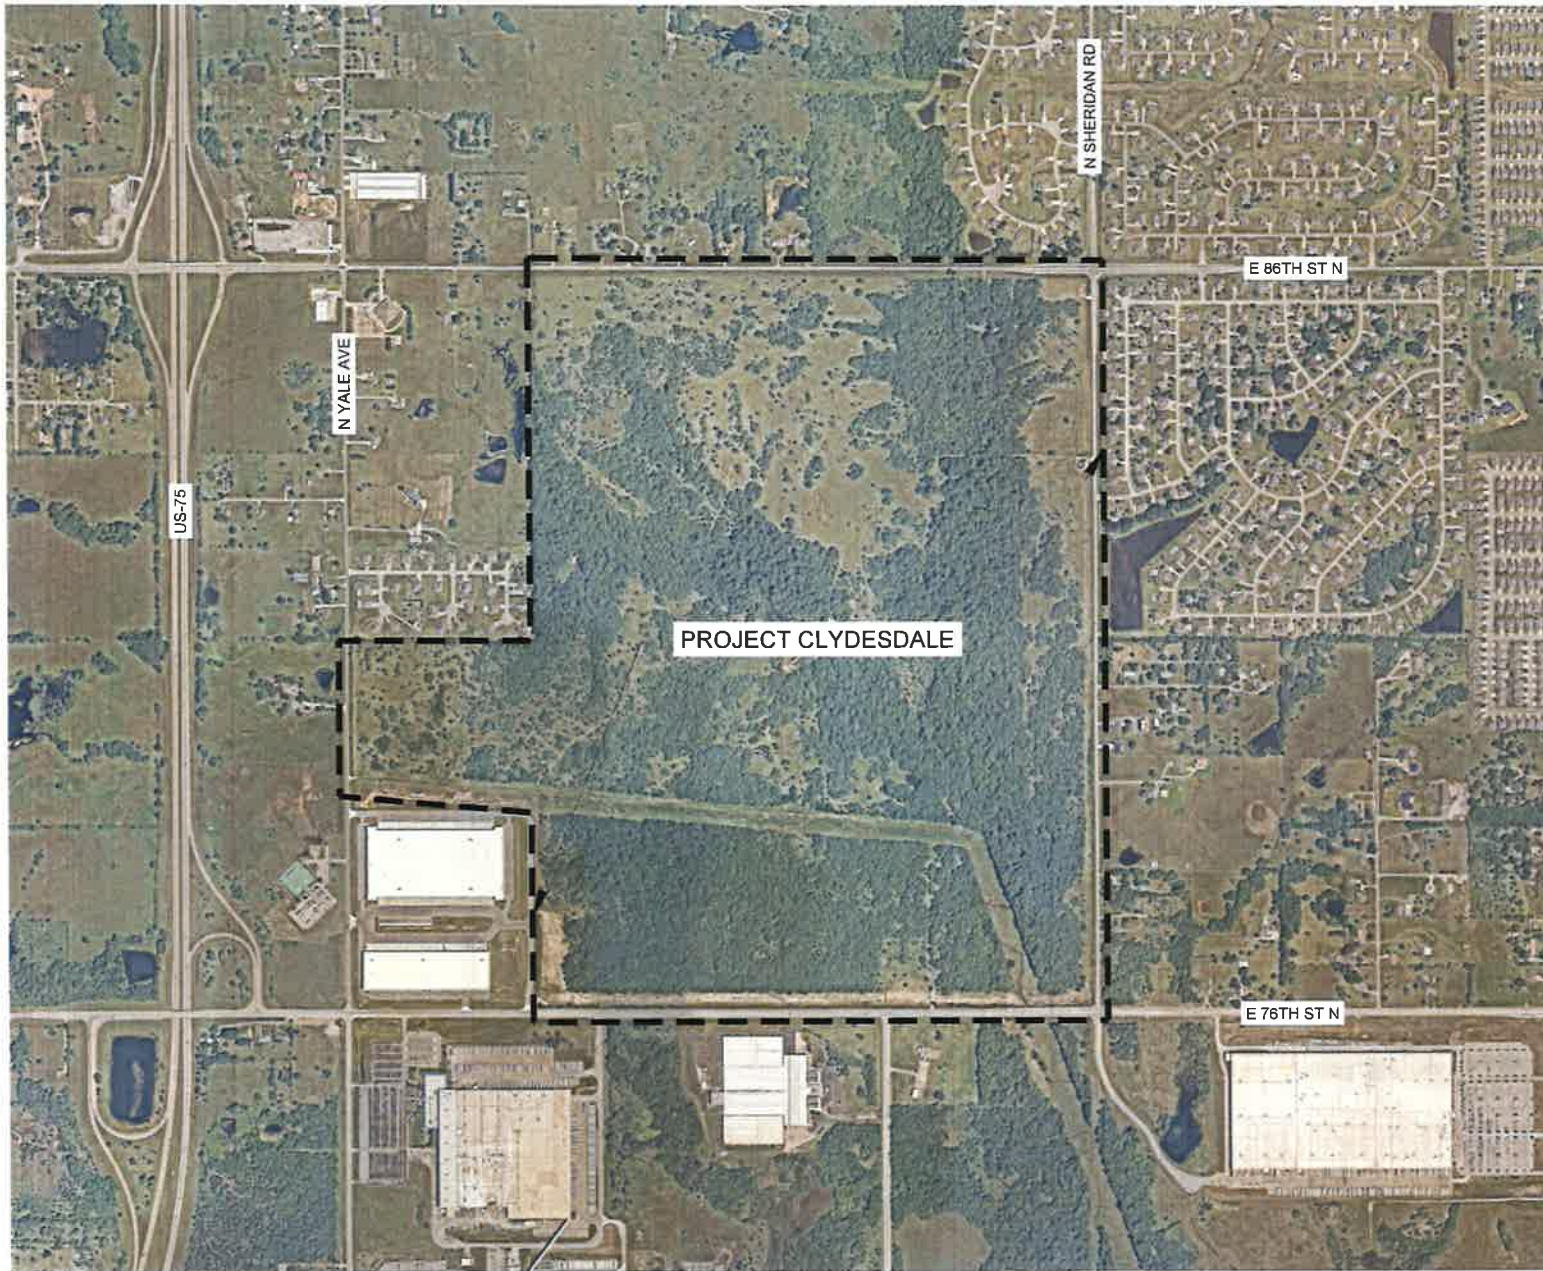



EXHIBIT A:
AERIAL IMAGE

PROJECT CLYDESDALE

TULSA COUNTY, OKLAHOMA
APRIL 2025

Kimley»Horn
1437 S. Douglas Dr.
Suite 300
Tulsa, OK 74118
918-380-6800

DATE: 4/15/25
PROJECT: PROJECT CLYDESDALE

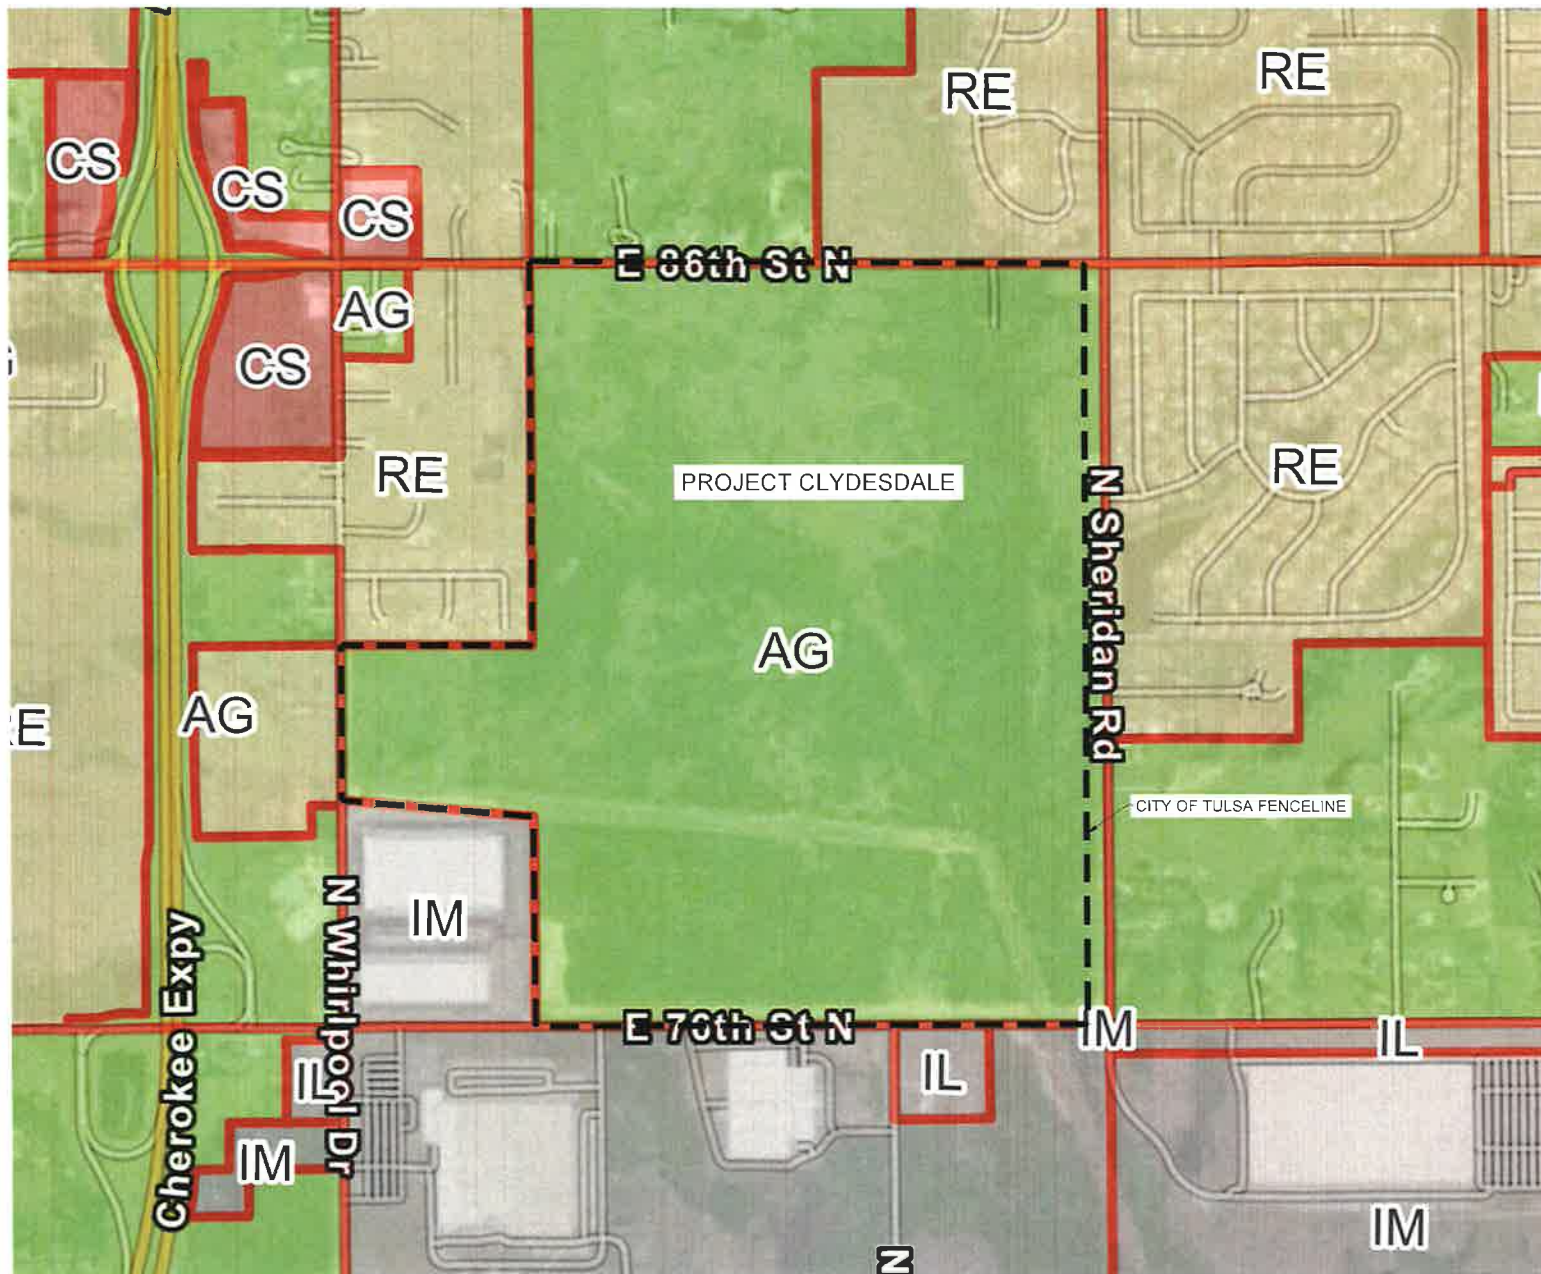

- Agriculture
- Commercial
- Office
- Industrial
- Light Residential
- Residential
- Manufactured Home
- Heavy Residential


EXHIBIT B:
EXISTING ZONING MAP

PROJECT CLYDESDALE

TULSA COUNTY, OKLAHOMA
APRIL 2025

Kinley»Horn

1407 S. Broadway
Suite 210
Tulsa, OK 74110
P 918-580-8828

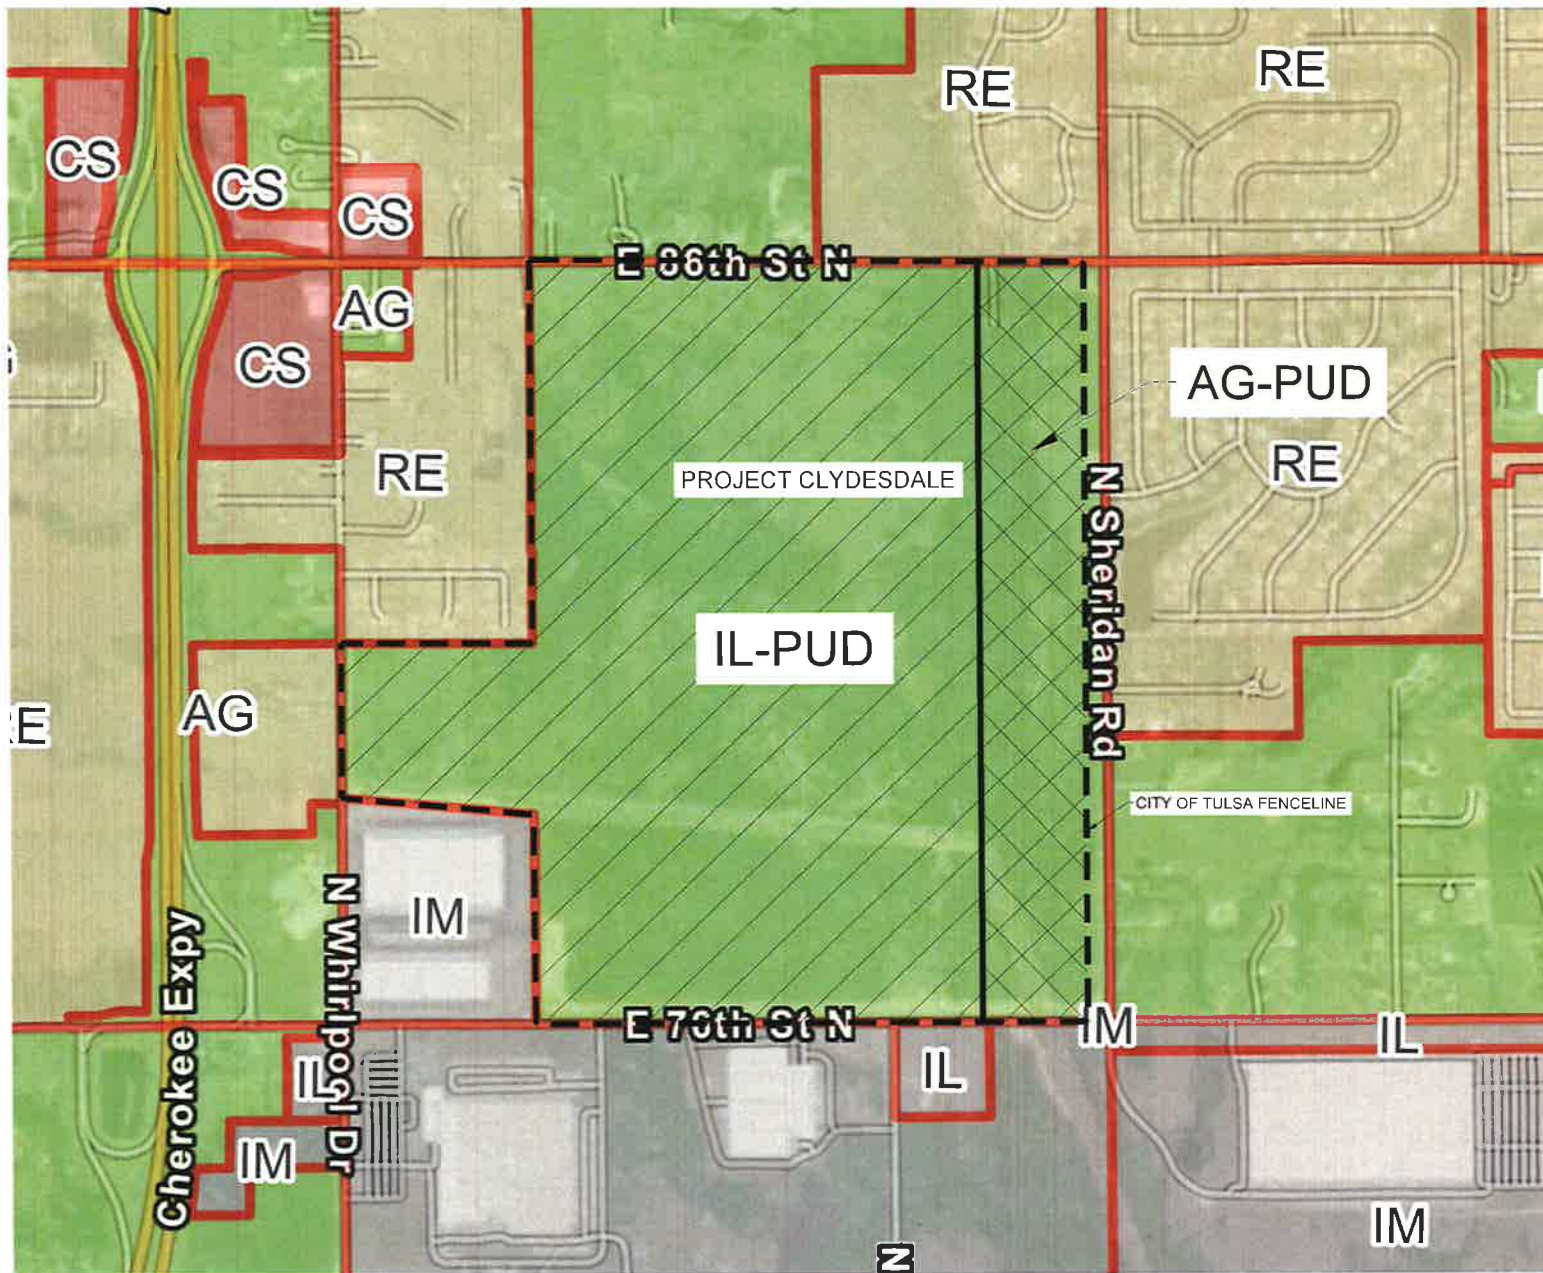

- Agriculture
- Commercial
- Office
- Industrial
- Light Residential
- Residential
- Manufactured Home
- Heavy Residential


EXHIBIT C:
PROPOSED ZONING MAP

PROJECT CLYDESDALE

TULSA COUNTY, OKLAHOMA
APRIL 2025

Kimley-Horn

1407 S. Hamilton Dr.
Suite 830
Tulsa, OK 74119
P 918-360-8868

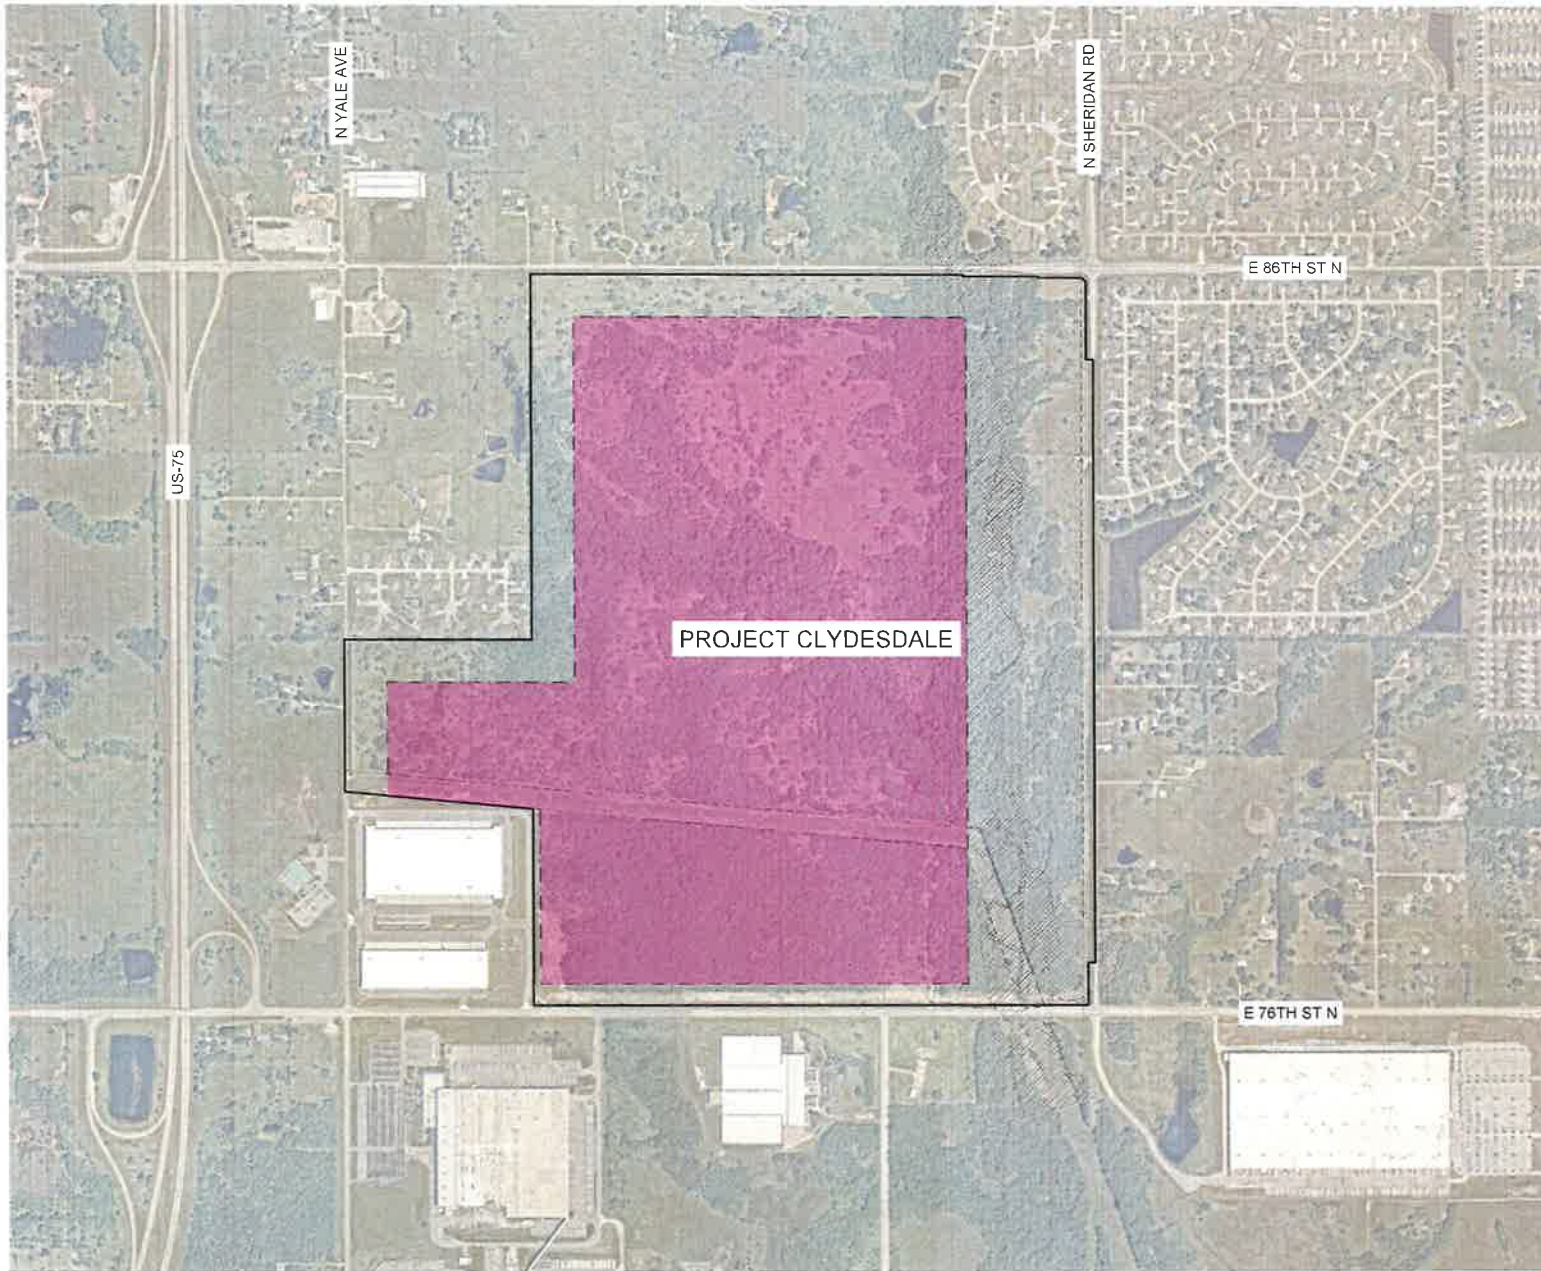

LEGEND



DEVELOPMENT AREA *

* DRIVEWAY CONNECTION LOCATIONS TO THE STREET NETWORK, UTILITY CORRIDORS, AND THE SITE PERIMETER FENCE WILL EXTEND BEYOND THE BOUNDARY OF THE DEVELOPMENT AREA SHOWN.

EXHIBIT D:
DEVELOPMENT AREA


PROJECT CLYDESDALE

TULSA COUNTY, OKLAHOMA
APRIL 2025

Kimley-Horn

1437 S. Boulder Dr.
Suite 300
Tulsa, OK 74119
P 918-583-6666

48-000
Tulsa County Development Corporation

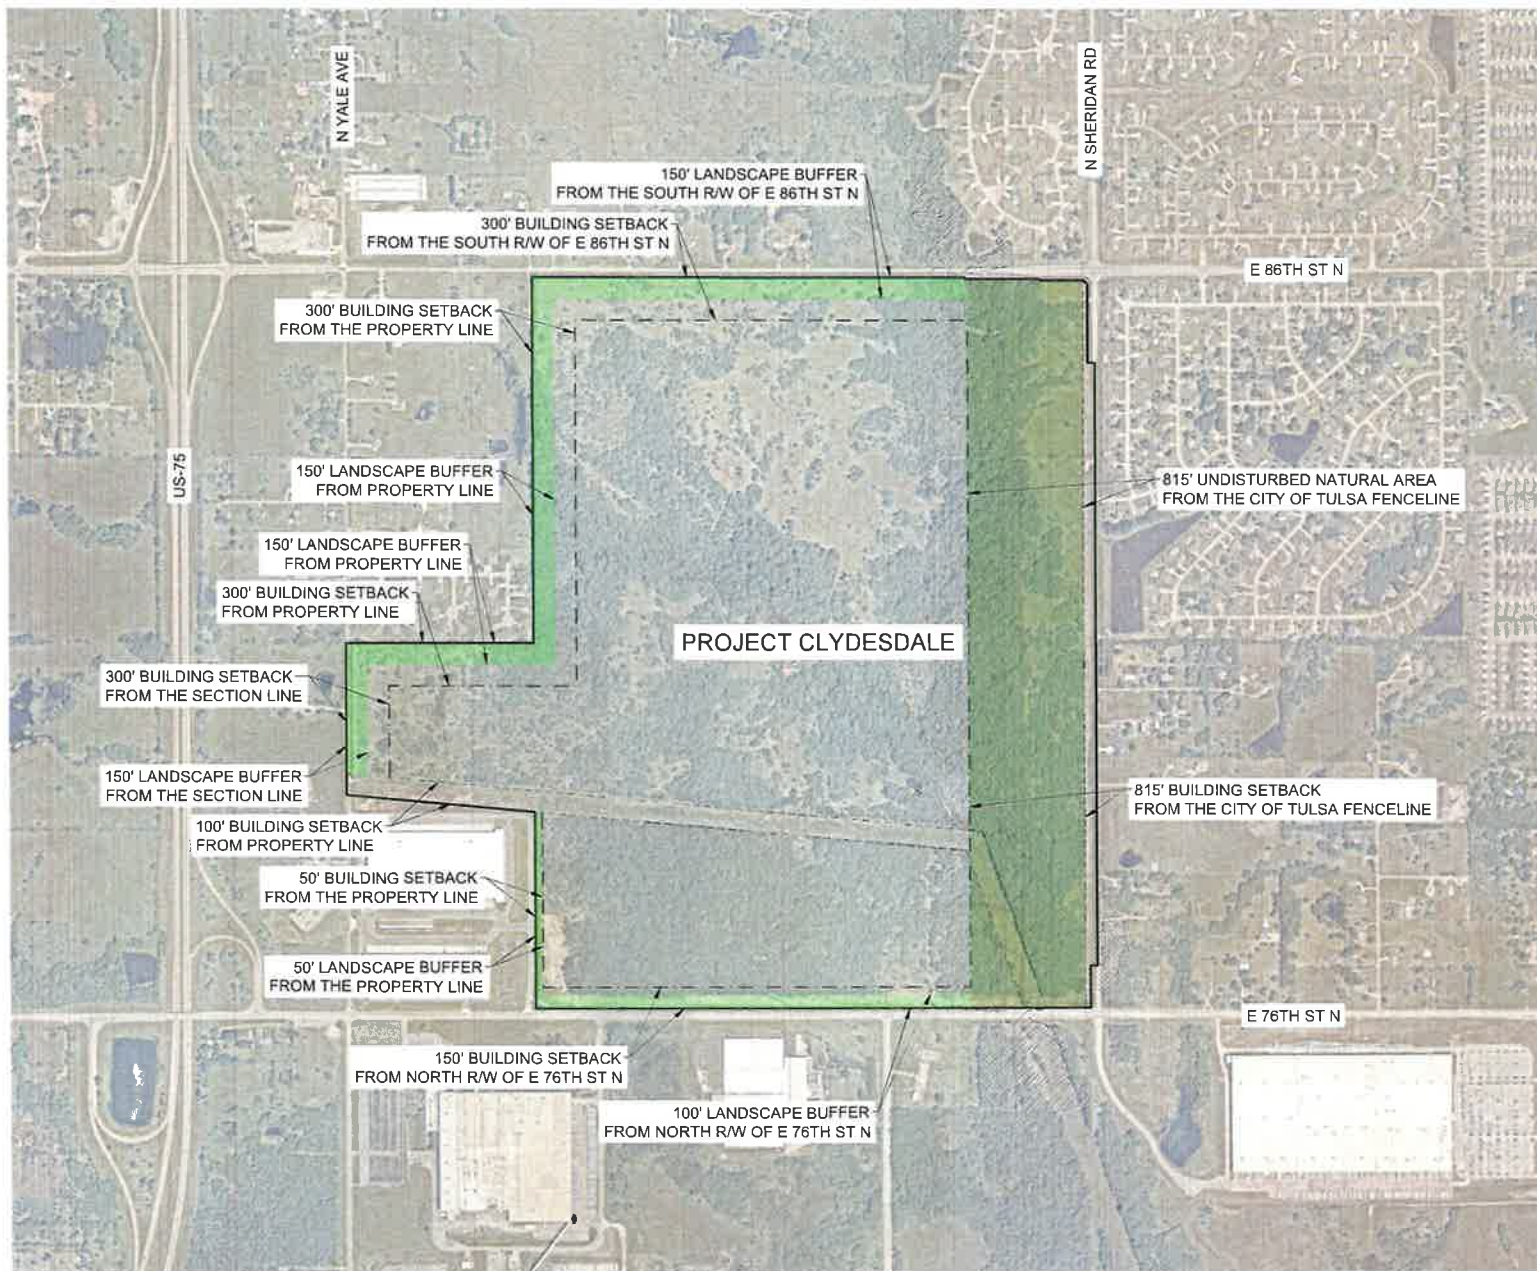

LEGEND

	LANDSCAPE BUFFER
	NATURAL AREA

MINIMUM BUILDING AND COMMUNICATION TOWER SETBACKS	
ALONG EAST 76TH STREET NORTH*	150 FEET
ALONG NORTH SHERIDAN ROAD*	815 FEET
ALONG EAST 86TH STREET NORTH*	300 FEET
ALONG NORTH YALE AVENUE (11")	300 FEET
ALONG THE SOUTHERLY BOUNDARY OF WESTGAGE ADDITION	300 FEET
ALONG THE NORTH APPROXIMATELY 2,000 FEET OF THE WEST BOUNDARY	300 FEET
ALONG THE WESTERLY BOUNDARY SOUTH OF THE GRDA ELECTRICAL RIGHT-OF-WAY	50 FEET

LANDSCAPE AND NATURAL BUFFERS	
ALONG EAST 76TH STREET NORTH*	100 FEET
ALONG NORTH SHERIDAN ROAD*	815 FEET
ALONG EAST 86TH STREET NORTH*	150 FEET
ALONG NORTH YALE AVENUE (11")	150 FEET
ALONG THE SOUTHERLY BOUNDARY OF WESTGAGE ADDITION	150 FEET
ALONG THE NORTH APPROXIMATELY 2,000 FEET OF THE WEST BOUNDARY	150 FEET
ALONG THE WESTERLY BOUNDARY SOUTH OF THE GRDA ELECTRICAL RIGHT-OF-WAY	50 FEET

- * SETBACKS SHALL BE MEASURED FROM (A) THE EXISTING STREET RIGHT-OF-WAY ALONG EAST 76TH STREET NORTH AND EAST 86TH STREET NORTH, (B) THE SECTION LINE ALONG NORTH YALE AVENUE, AND (C) THE EDGE OF THE CITY OF TULSA FENCELINE ALONG NORTH SHERIDAN ROAD.
- ** ELECTRICAL SUBSTATIONS SHALL BE SUBJECT TO THE BUILDING SETBACKS SET FORTH ABOVE.

EXHIBIT E: SETBACK AND LANDSCAPE BUFFER

PROJECT CLYDESDALE

TULSA COUNTY, OKLAHOMA
APRIL 2025

Kimley»Horn

1437 S Boulder Dr.
Suite 920
Tulsa, OK 74119
P 918-300-0228

10-100
1. SCALE: 1" = 100' (AS SHOWN ON MAP)

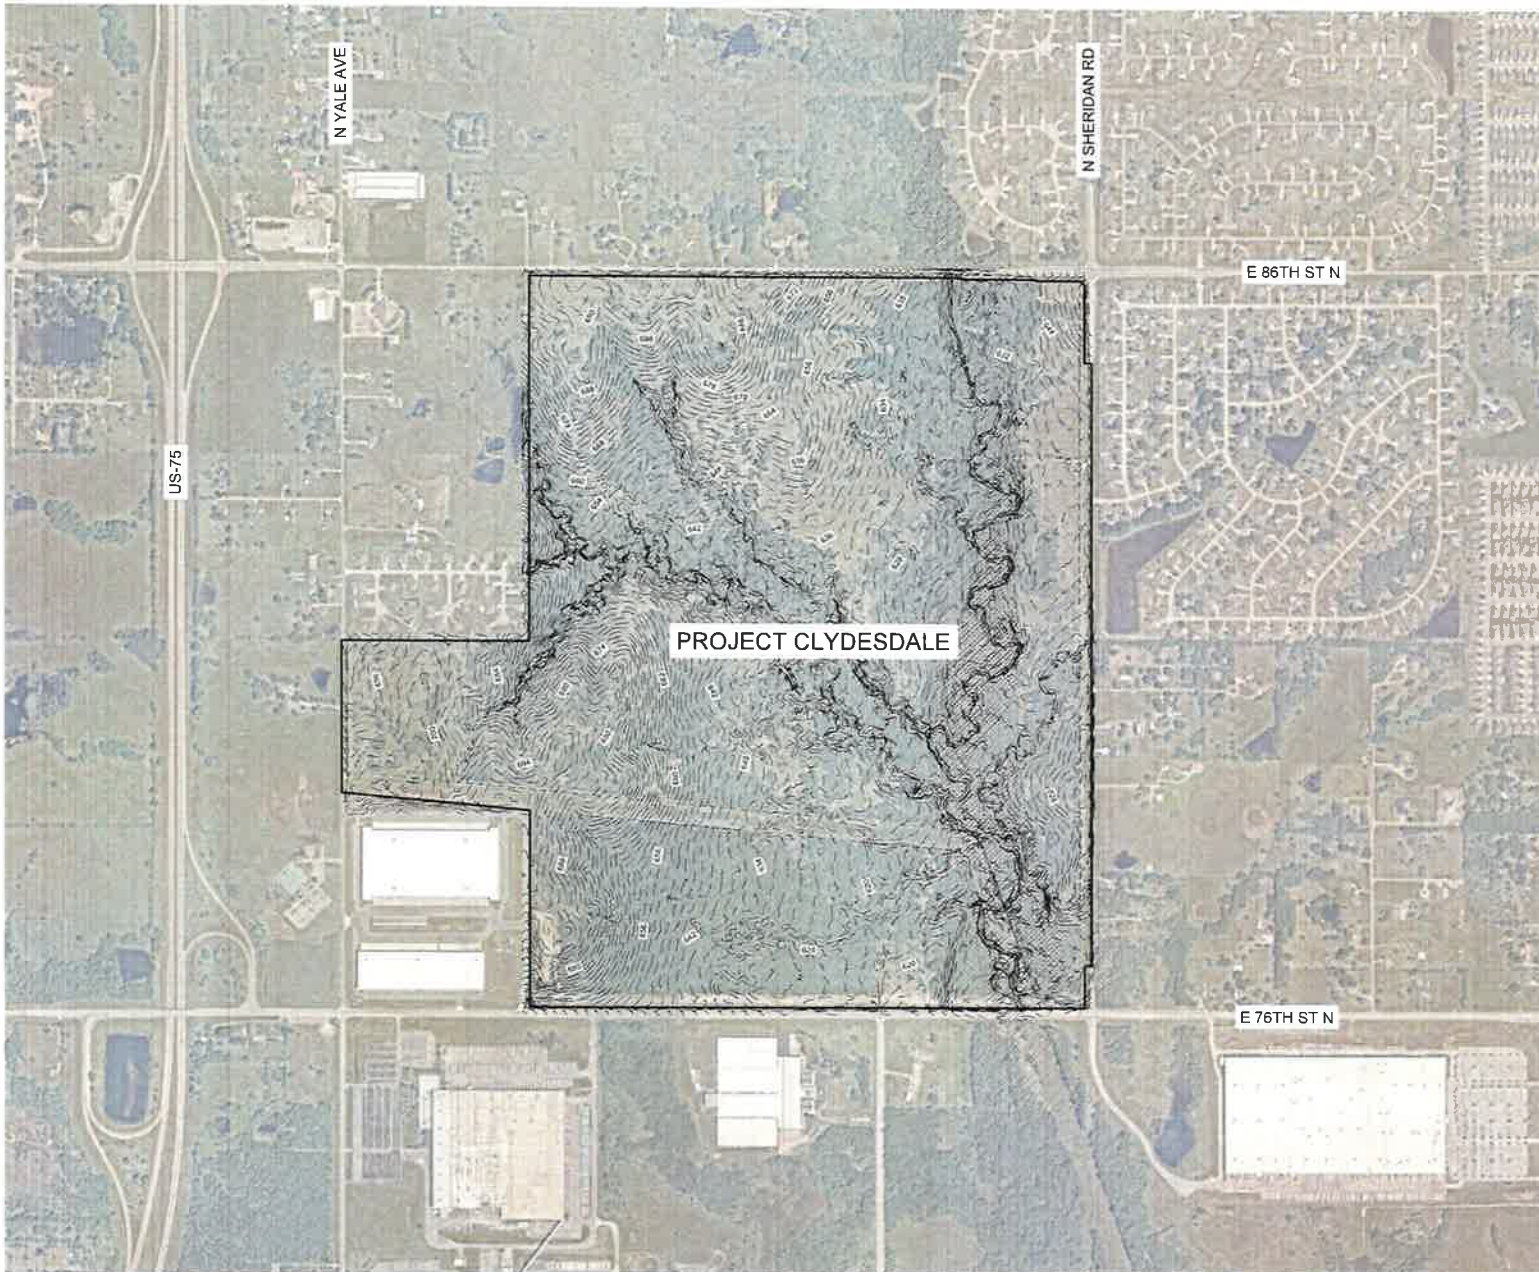


EXHIBIT F (SHEET 1 OF 2):
EXISTING TOPOGRAPHY


PROJECT CLYDESDALE

TULSA COUNTY, OKLAHOMA
APRIL 2025

Kimley»Horn

1437 S Boulder Dr
Suite 650
Tulsa, OK 74119
P 918-303-0888

NO. 238
APRIL 2025 BY: [signature] LSC/10501-2025

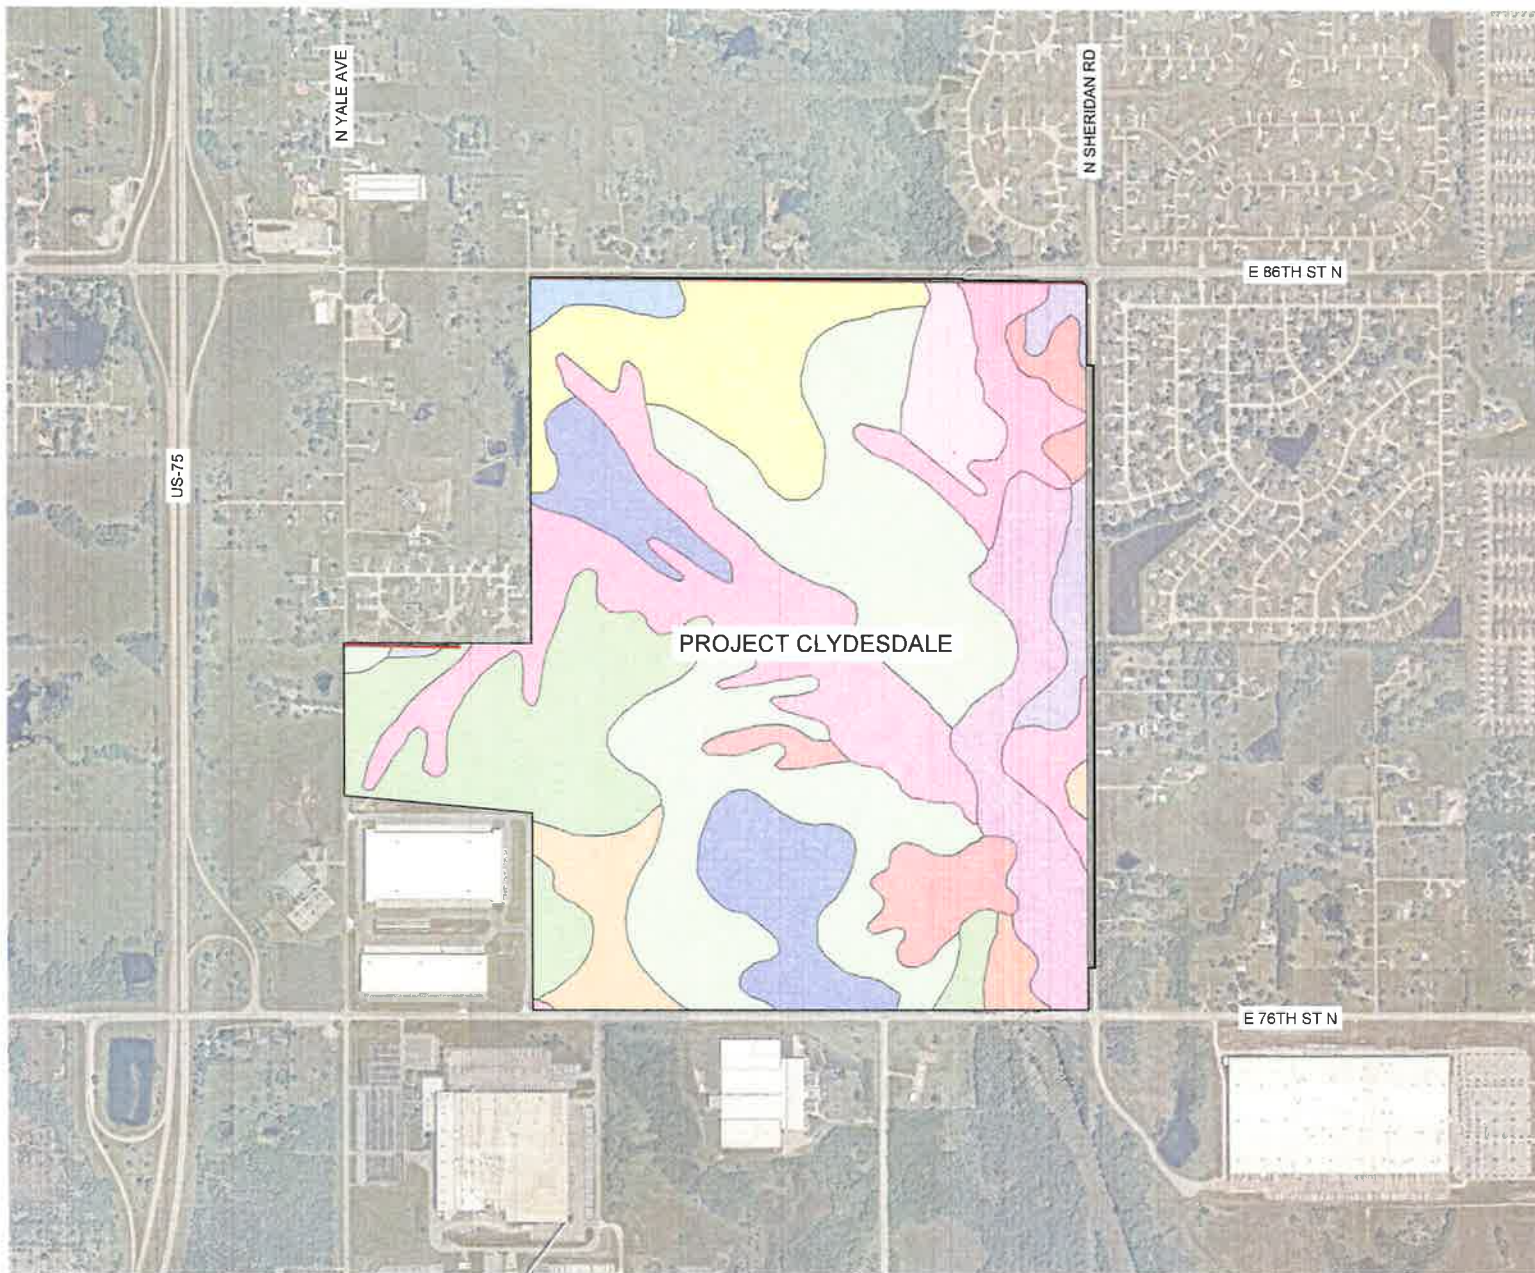

Legend

NRCS Soils

- Bates-Coweta complex, 3 to 5 percent slopes
- Coweta-Bates complex, 3 to 5 percent slopes
- Dennis silt loam, 1 to 3 percent slopes
- Dennis silt loam, 3 to 5 percent slopes
- Dennis silt loam, 3 to 5 percent slopes, eroded
- Dennis-Pharoah complex, 1 to 3 percent slopes
- Dennis-Radley complex, 0 to 12 percent slopes
- Eram silty clay loam, 3 to 5 percent slopes
- Eram-Coweta complex, 5 to 15 percent slopes
- Okemah silt loam, 0 to 1 percent slopes
- Okemah-Parsons-Pharoah complex, 0 to 1 percent slopes
- Radley silt loam, 0 to 1 percent slopes, frequently flooded
- Wynona silty clay loam, 0 to 1 percent slopes, occasionally flooded

EXHIBIT F (SHEET 2 OF 2):
EXISTING SOILS


PROJECT CLYDESDALE

TULSA COUNTY, OKLAHOMA
APRIL 2025

Kimley»Horn

1437 S Boulder Dr.
Suite 800
Tulsa, OK 74119
P 918-200-8888

NOTES:
1. Information is for reference only.

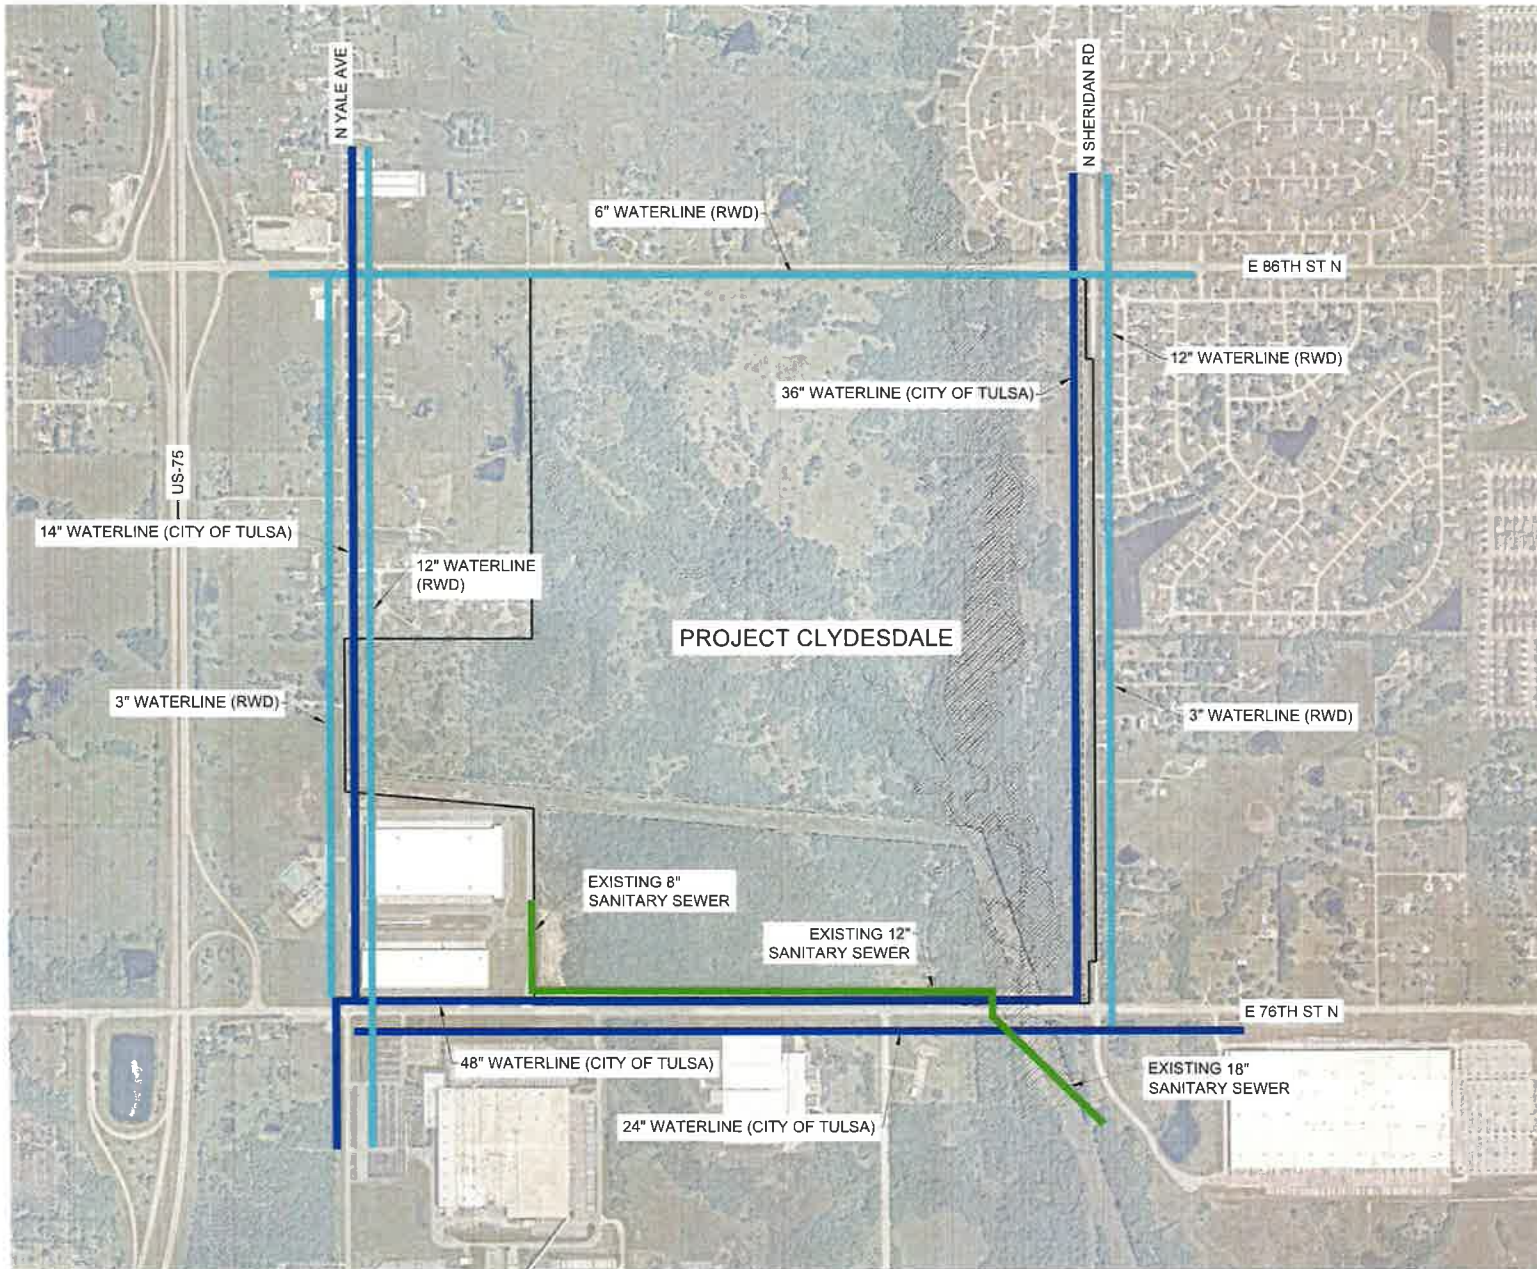

LEGEND	
—	CITY OF TULSA WATERLINE
—	RURAL WATER DISTRICT (RWD) WATERLINE
—	SANITARY SEWER LINE

EXHIBIT G
EXISTING UTILITIES

PROJECT CLYDESDALE

TULSA COUNTY, OKLAHOMA
APRIL 2025

Kimley»Horn

1437 S Boulder Dr
Suite 600
Tulsa, OK 74119
P 918-380-8888

45-30
1:2500 SCALE OF REGIONAL MAPSHEET - 30